

BUDGET HEIGHT ADJUSTABLE ASSEMBLY INSTRUCTIONS RADIAL DESKS

Rack Systems (Engineering) Ltd
19-25 Dove way,
Kirkby Mills Industrial Estate,
Kirkbymoorside,
York
YO62 6QR

Tel; 01751 432647 Fax; 01751 433375

**PRIOR TO ASSEMBLY ENSURE ALL
GEARS ARE GENTLY WOUND DOWN
TO THEIR FULLY CLOSED POSITION**

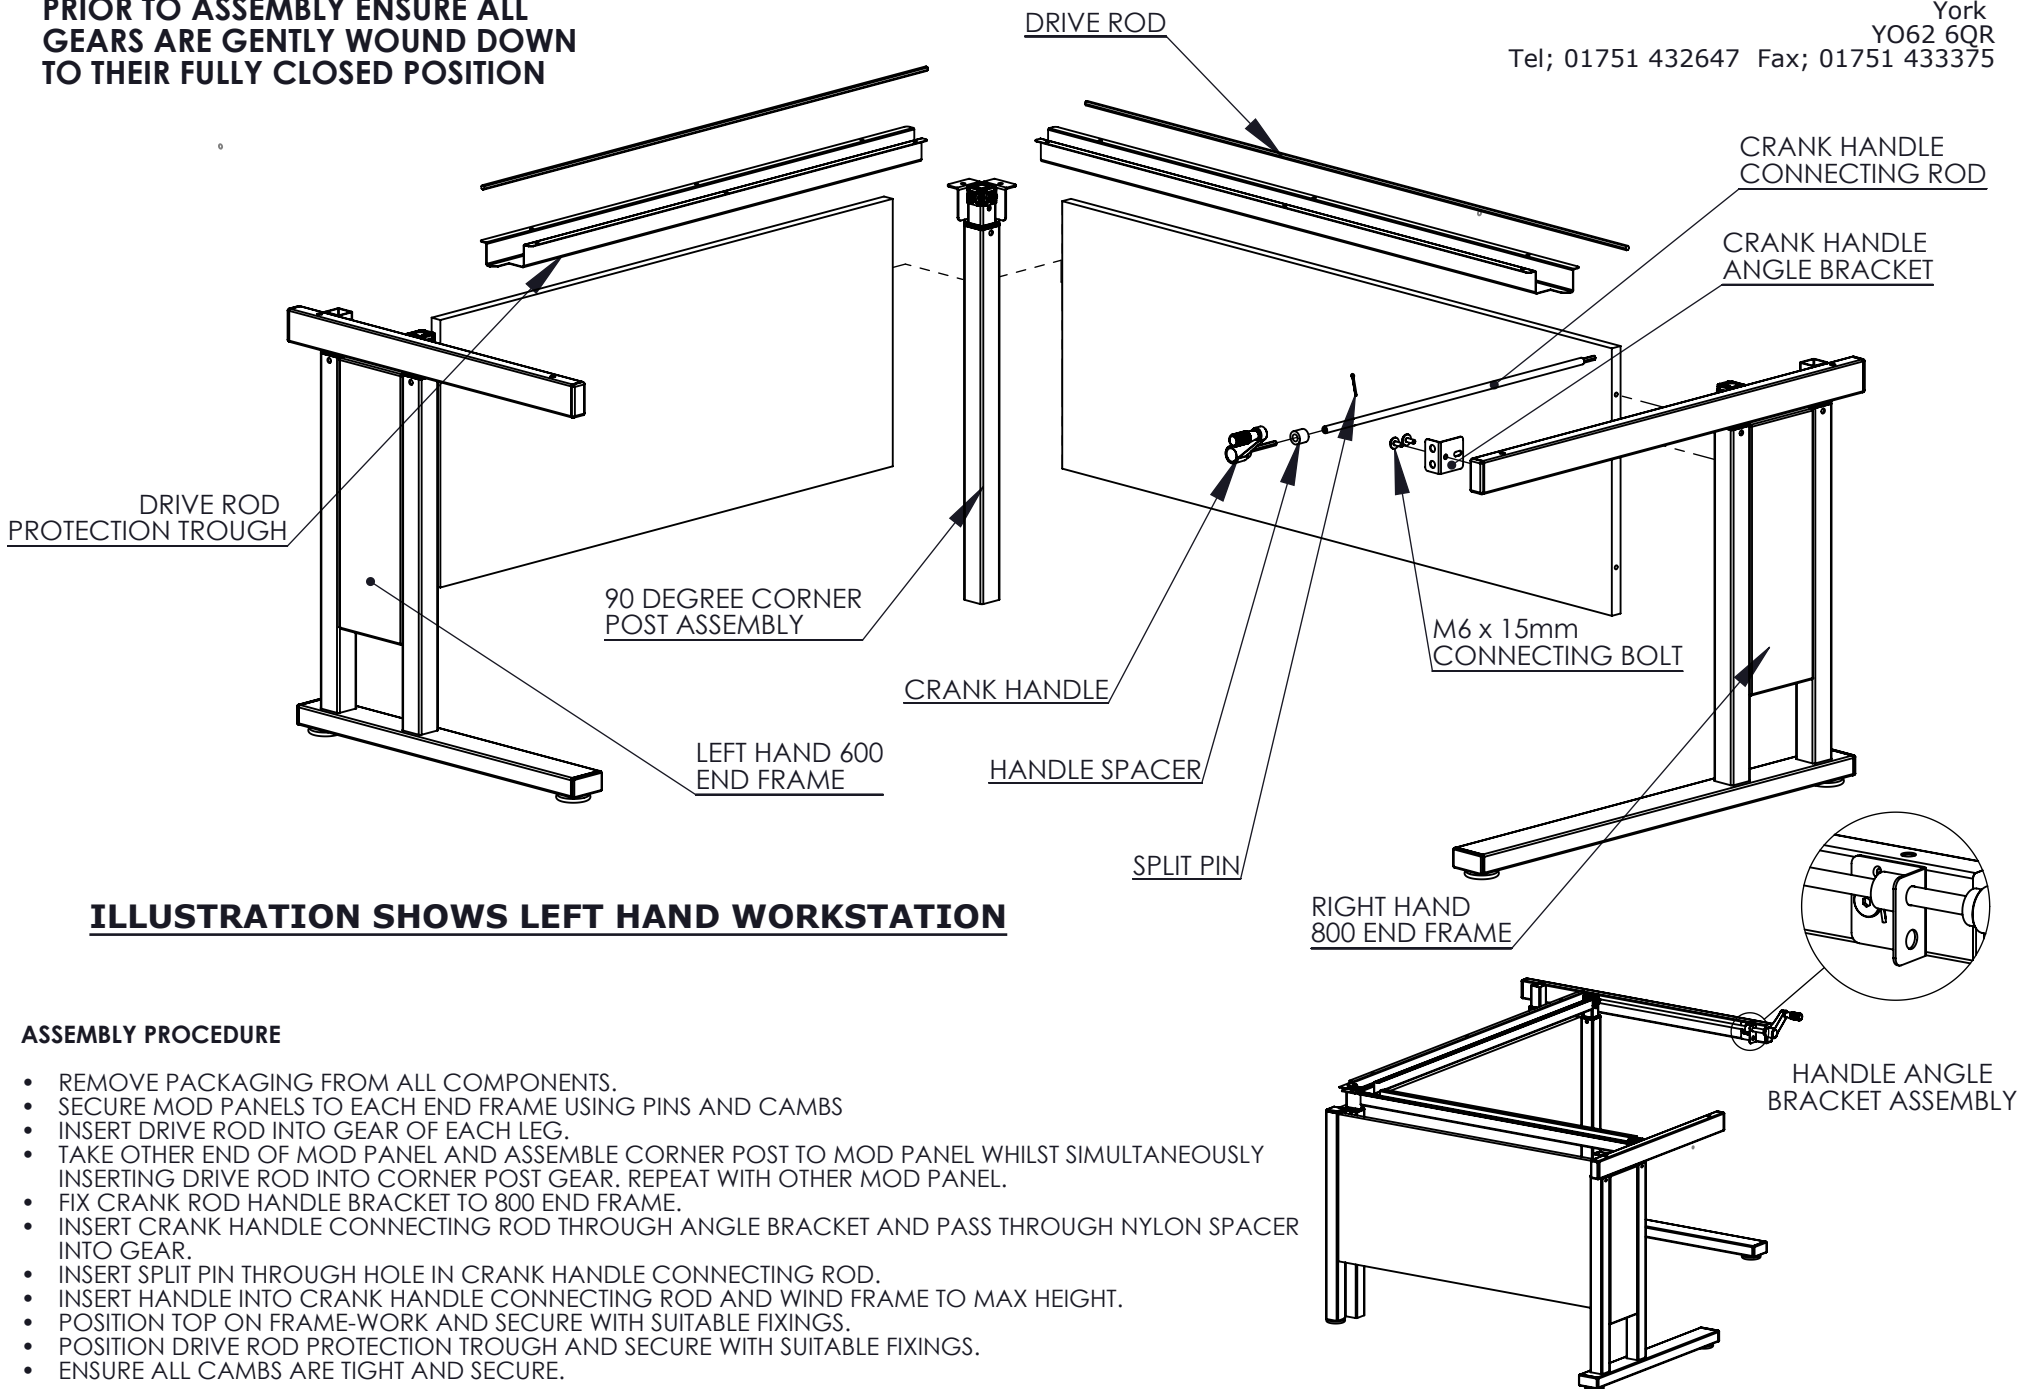


ILLUSTRATION SHOWS LEFT HAND WORKSTATION

ASSEMBLY PROCEDURE

- REMOVE PACKAGING FROM ALL COMPONENTS.
- SECURE MOD PANELS TO EACH END FRAME USING PINS AND CAMBS
- INSERT DRIVE ROD INTO GEAR OF EACH LEG.
- TAKE OTHER END OF MOD PANEL AND ASSEMBLE CORNER POST TO MOD PANEL WHILST SIMULTANEOUSLY INSERTING DRIVE ROD INTO CORNER POST GEAR. REPEAT WITH OTHER MOD PANEL.
- FIX CRANK ROD HANDLE BRACKET TO 800 END FRAME.
- INSERT CRANK HANDLE CONNECTING ROD THROUGH ANGLE BRACKET AND PASS THROUGH NYLON SPACER INTO GEAR.
- INSERT SPLIT PIN THROUGH HOLE IN CRANK HANDLE CONNECTING ROD.
- INSERT HANDLE INTO CRANK HANDLE CONNECTING ROD AND WIND FRAME TO MAX HEIGHT.
- POSITION TOP ON FRAME-WORK AND SECURE WITH SUITABLE FIXINGS.
- POSITION DRIVE ROD PROTECTION TROUGH AND SECURE WITH SUITABLE FIXINGS.
- ENSURE ALL CAMBS ARE TIGHT AND SECURE.